

General Data

Model:	AT 150/4/200 C.260
Code:	2000185
Series:	A4
Weight [Kg]	230.00
Submersible eletropumps for wastewater including sewage	

Hydraulic

Impeller Type:	-
Delivery DN [mm]:	DN150 PN16
Input DN [mm]:	150
Free Passage [mm]:	80
Impeller Ø [mm]:	-
Max Pump Efficiency [%]:	0.0
Global Efficiency [%]:	1.48
Head [m]:	13.89
Flow [m³/h]:	144.00

Tolerance according to ISO 9906:2012 3B2



Attention: pictures for illustrative purposes

Features

Upper Meccanical seal:	CA/CE/Viton
Lower Meccanical Seal:	SIC/SIC/Viton
Upper Bearing:	Spherical roller bearings
Lower Bearing:	Double raw ball bearing
IP Protection:	IP68
Motor protection:	present
Humidity sensor:	present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	3.80

Materials



Pump:	-
Impeller:	-
Motor shaft:	-
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

Pumped Liquid

Pumped Liquid:	Light and lightly sewage
Density [Kg/dm³]:	1.1
pH:	2023-10-06
Temperature Range:	0-40°C

Installation

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	
Floating on board machine:	not present

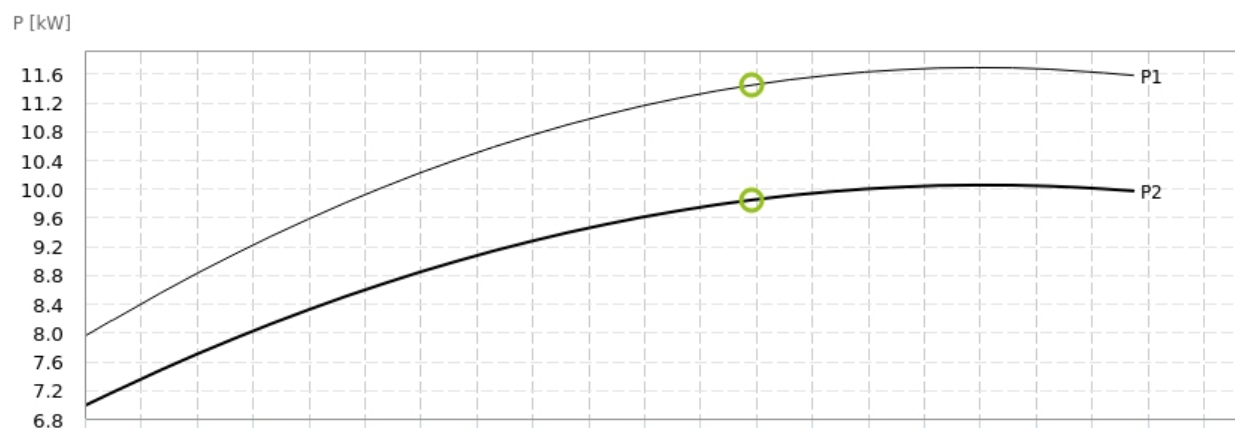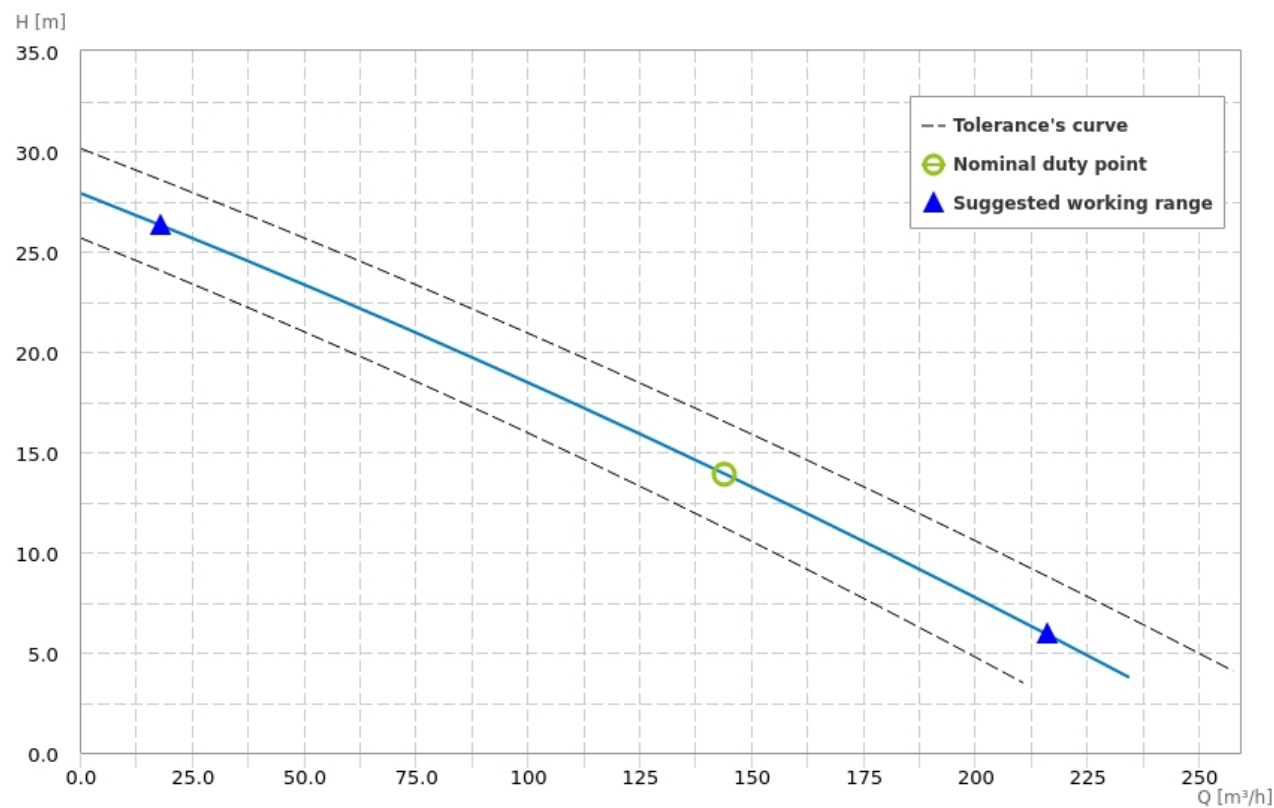


η global [%]



Motor

Motor code:	3521000210
Power P1 [kW]:	11.70
Power P2 [kW]:	10.00
Phases:	3
Frequency [Hz]:	50
Tension [V]:	400
Nominal current [A]:	21.3
Starting current [%]:	383.0
Power Factor:	0.80
R.P.M.:	1450
Starting:	Y-D
Capacitor [μF]:	0.0
Insulation Class:	F 155°C
Service type:	S1
Max Efficiency [%]:	88.60
Max Efficiency at full load [%]:	87.3
Efficiency at ¾ load [%]:	88.2
Efficiency at ½ load [%]:	87.0
Efficiency class:	IE2

Wiring diagrams

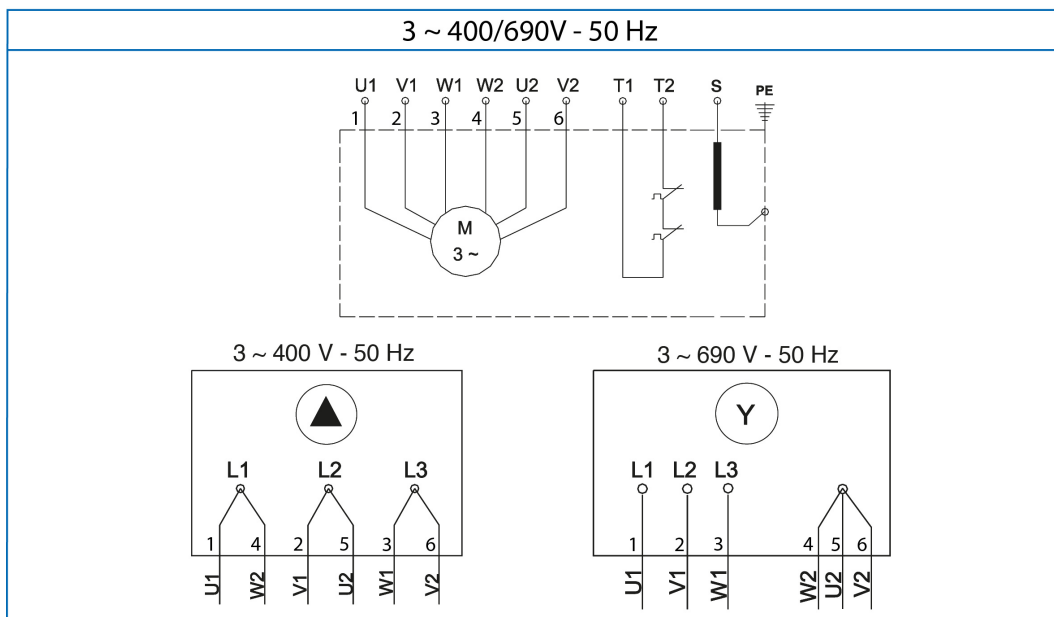

Dimensions drawing

