

General Data

Model:	GRIX 32-2/090 M/G
Code:	2001582
Series:	GRIX
Weight [Kg]	21.50

Submersible eletropumps for sewage with an inbuilt macerator in the inlet

Hydraulic

Impeller Type:	-
Delivery DN [mm]:	G 1"1/4 DN32 PN6
Input DN [mm]:	-
Free Passage [mm]:	-
Impeller Ø [mm]:	135
Max Pump Efficiency [%]:	0.0
Global Efficiency [%]:	0.05
Head [m]:	13.29
Flow [m³/h]:	5.40

Tolerance according to ISO 9906:2012 3B2

Features

Upper Meccanical seal:	Lips seal
Lower Meccanical Seal:	Silicon carbide/Ceramic/Viton
Upper Bearing:	Single raw ball bearing
Lower Bearing:	Single raw ball bearing
IP Protection:	IP68
Motor protection:	not present
Humidity sensor:	not present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	0.40

Materials

Pump:	-
Impeller:	-
Motor shaft:	-
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

Pumped Liquid




Pumped Liquid:	Sewage
Density [Kg/dm³]:	1.1
pH:	2023-10-06
Temperature Range:	0-40°C

Installation

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	
Floating on board machine:	present




Attention: pictures for illustrative purposes

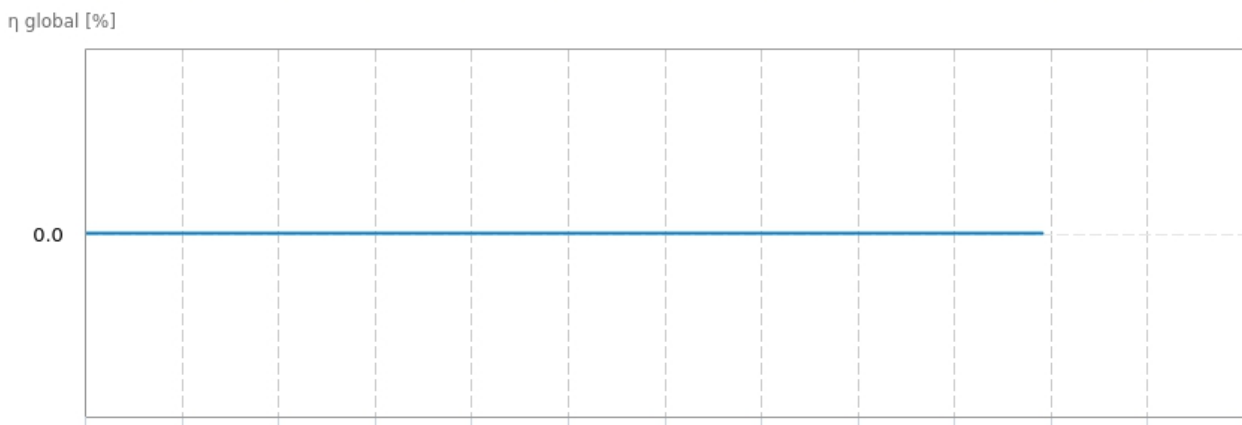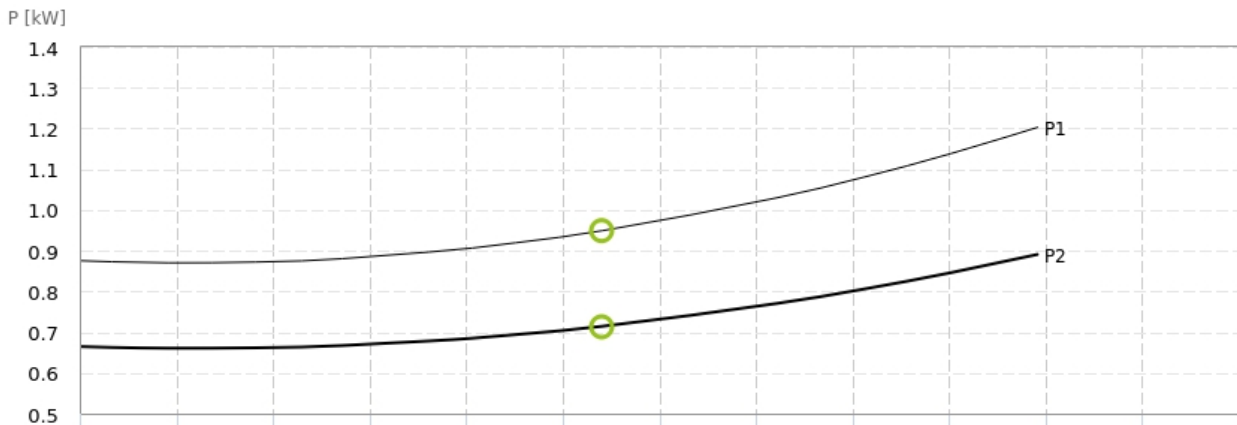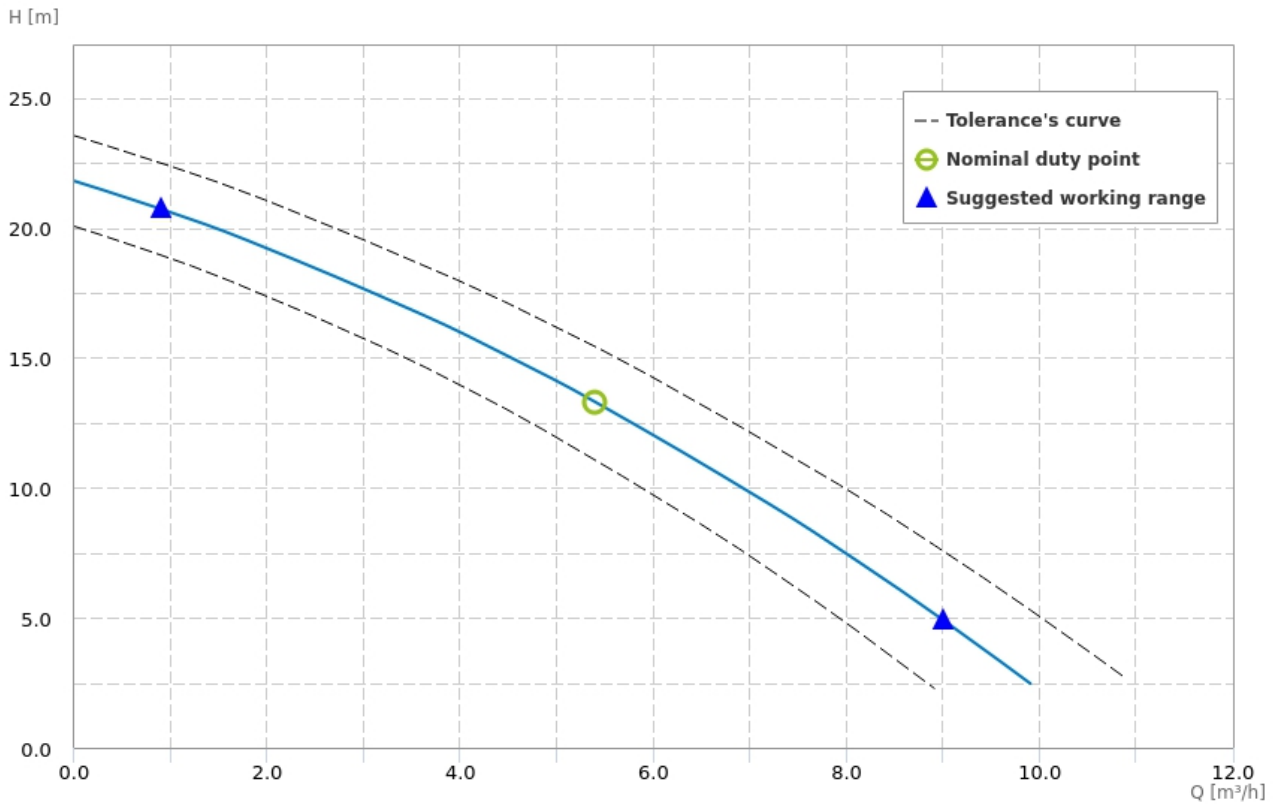

Motor

Motor code:	3520140210
Power P1 [kW]:	1.20
Power P2 [kW]:	0.90
Phases:	1
Frequency [Hz]:	50
Tension [V]:	230
Nominal current [A]:	5.0
Starting current [%]:	356.0
Power Factor:	0.98
R.P.M.:	2850
Starting:	D.O.L
Capacitor [μ F]:	25.0
Insulation Class:	F 155°C
Service type:	S2
Max Efficiency [%]:	88.10
Max Efficiency at full load [%]:	83.0
Efficiency at $\frac{3}{4}$ load [%]:	85.9
Efficiency at $\frac{1}{2}$ load [%]:	85.4
Efficiency class:	-

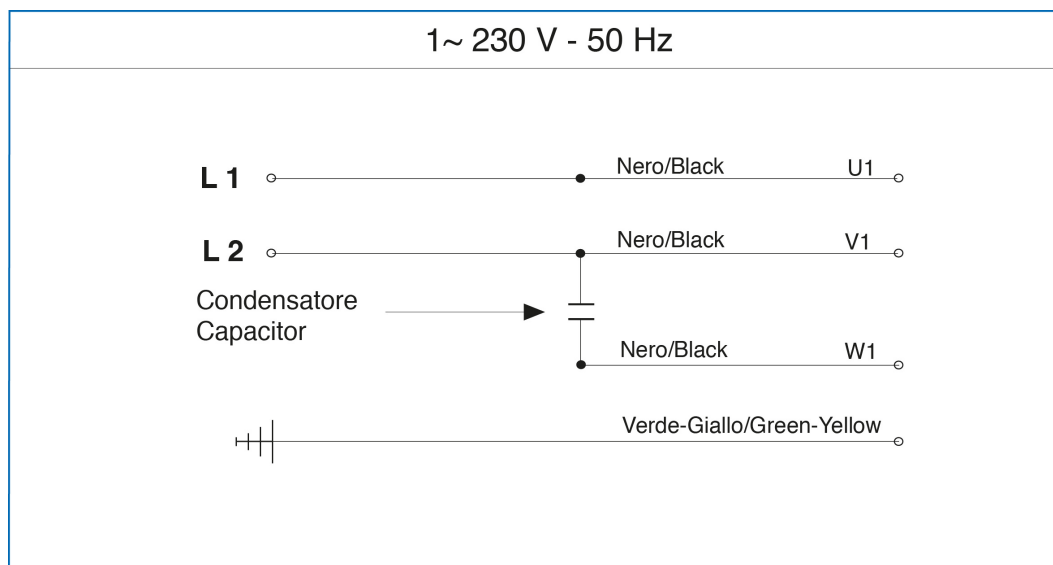Wiring diagrams

Dimensions drawing

